

CHL 1 H4 - Ref. CHL 1 H4 RANGE LHT / D14320 / D14322 / 3800 H4 LH



TECHNICAL CHARACTERISTICS


Brand	ABL
Reference detail	D14320 (DT 6 pin, pedestal, 12V); D14322 (DT 6 pin, pedestal, 24V)
Voltage	12/24V
Source	HALOGEN
Bulb	H4, PY21, W5W
Connector	Cable compression seal PG11, DT 6 pin
Mounting	Pedestal, suspended, side swivel, rear swivel
Side	Left
Lens Material	Hardened glass
Housing Material	Black fibre reinforced plastic
Length	240 mm
Depth	127 mm
Height	164 mm
IP protection	IP66 - IP69K
Operation Temperatures	-40°C to +85°C
ECE	ECE

CHL 1 H4 - Ref. CHL 1 H4 RANGE LHT / D14320 / D14322 / 3800 H4 LH

Industry

Agriculture, Construction, Forestry, Handling and Forklifts, Priority vehicle, Trailers and Semi-trailers, Trucks, Vans and Chassis cab

OTHER VISUALS

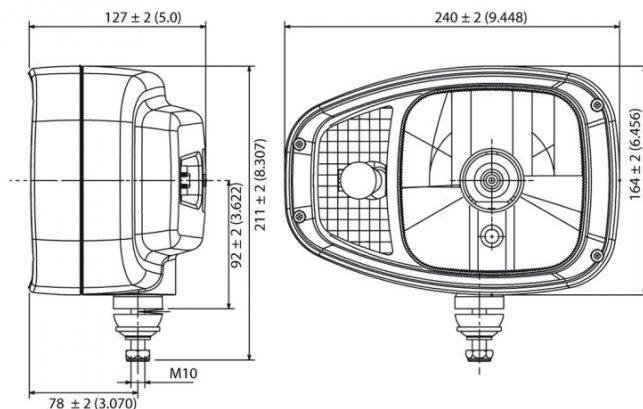

ACCESSORIES



D14352

**Connectors - Repair
kit connector Deutsch
6 way female**