

CHL 1 H4 - Ref. CHL 1 H4 RANGE RHT / D14321 / D14323 / 3800 H4 RH



TECHNICAL CHARACTERISTICS


Brand	ABL
Reference detail	D14321 (DT 6 pin, pedestal, 12V); D14323 (DT 6 pin, pedestal, 24V)
Voltage	12/24V
Source	HALOGEN
Bulb	H4, PY21, W5W
Connector	Cable compression seal PG11, DT 6 pin
Mounting	Pedestal, suspended, side swivel, rear swivel
Lens Material	Hardened glass
Housing Material	Black fibre reinforced plastic
Length	240 mm
Depth	127 mm
Height	164 mm
IP protection	IP66 - IP69K
Operation Temperatures	-40°C to +85°C
Salt Spray Test	ISO 9227
ECE	ECE

CHL 1 H4 - Ref. CHL 1 H4 RANGE RHT / D14321 / D14323 / 3800 H4 RH

Industry

Agriculture, Construction, Forestry, Handling and Forklifts, Priority vehicle, Trailers and Semi-trailers, Trucks, Vans and Chassis cab

OTHER VISUALS

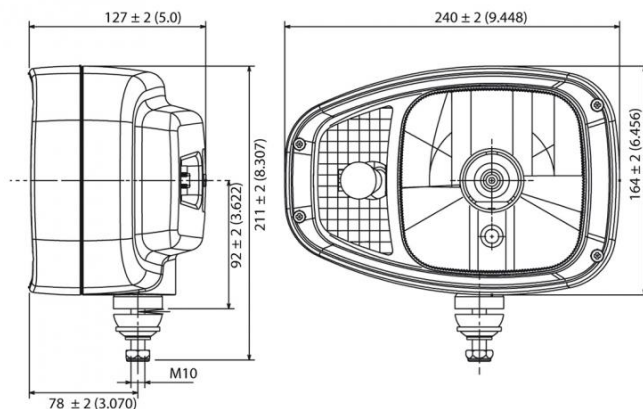

ACCESSORIES



D14352

**Connectors - Repair
kit connector Deutsch
6 way female**



CHL 1 H4 RANGE LHT

**CHL 1 H4 - Driving
light left ECE
HALOGEN 12/24V**