

CTL14 LED - Ref. 163050 / CTL14 S1 / SARR 85CTL14S1



Stop, position and reverse. Compact and design, it is particularly suitable for installation on forklifts, pallet trucks, agricultural tractors, or small trailers. Electronic performance has been improved for better electromagnetic compatibility (EMC).

You can combine with the light 163010 (stop, position, dynamic indicator).

TECHNICAL CHARACTERISTICS

Brand	VIGNAL
Product Type	Complete lamp
Manufacturer	Doosan
Voltage	12/24V
Source	LED
Connector	DT4
Mounting Direction	Horizontal
Side	Left/Right
Shape	Rectangle
Fixation Bolt Distance	191 mm
Length	209 mm
Width	58 mm
Main Functions	Stop, Position, Reverse
IP protection	IP69K
Operation Temperatures	-30°C to +65°C
EMC	E2 10R-0517254

www.vignal-group.com - contact@vignal-group.com

France Lyon HQ : +33 (0)4 72 917 917
France Caen : +33 (0)2 31 74 73 13
France Le Mans : +33 (0)2 43 50 14 14

Switzerland Rancate : +41 (0) 91 640 50 80
US Mosinee : +1 715 693 1530
China Changzhou : +86 137 7686 3469



Print date : 22/06/2026

CTL14 LED - Ref. 163050 / CTL14 S1 / SARR 85CTL14S1

ECE	E2 20056
Industry	Agriculture, Construction, Forestry, Handling and Forklifts, Mining, Trailers and Semi-trailers


APPLICATIONS

Manufacturer	Model	Reference	Start date	End date
DOOSAN	Excavator	301005-02178A	10/2020	

OTHER VISUALS



CTL14 LED - Ref. 163050 / CTL14 S1 / SARR 85CTL14S1

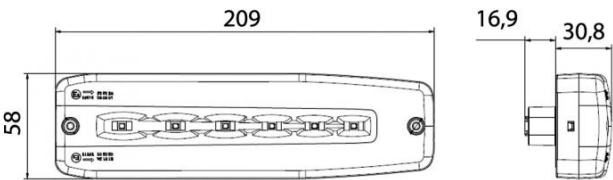

CONNECTOR DETAIL

DT04-4P DEUTSCH Connector Match with DT06 4S or similar
Voltage Range: 10-32V



PIN	Function	Power max.
	LAMP	9W
1	INDICATOR or REVERSE REcul	5W
2	TAIL POSITION	2W
3	GROUND MASSE	-
4	STOP	4W



ACCESSORIES



D14436
Connectors - Repair
kit connector Deutsch
4-way DT 06-4S female